

PT-051: Underwater Case System Chart



Waterproof Compact Cameras TOUGH TG-810
Silver Black



Waterproof Compact Cameras TOUGH TG-610
Blue Red Silver Black



Electronic Flash UFL-1
• Withstand pressure water depth: 40 m



Underwater optical fiber cable PTCB-E02



Optical Cable Adapter PFCA-01
(provided with the PT-051)



Short Arm PTSA-02



Adapter PTAC-09
(provided with the PT-051)



Adapter PTAC-08
(provided with the PT-051)



Underwater Wide Conversion Lens PTWC-01
Underwater approx. 0.6X (underwater angle of view approx. 100°)
• Lens construction: 4 elements in 4 groups
• Size: φ131 mm x 69 mm Weight: 1,000 g
• Lens mount diameter: φ67 mm
• When used on land, the four corners of the image get cropped.



Electronic Flash UFL-2
• Withstand pressure water depth: 60 m

Note: The UFL-2 can only be used for the TOUGH TG-810.




Diffuser for UFL-2 UFLDP-3



Short Arm PTSA-03



Underwater Case for TOUGH TG-810 / TOUGH TG-610 PT-051



Step-up Ring PSUR-03
• φ52mm-67mm



LCD hood PFUD-08
(provided with the PT-051)



Lens Cap PRLC-12
(provided with the PT-051)



Underwater Macro Conversion Lens PTMC-01
Underwater approx. 2X (area ratio)
• Lens construction: 2 elements in 1 group
• Size: φ70 mm x 18 mm Weight: 146 g
• Lens mount diameter: φ67 mm
• The tip is provided with a 67 mm diameter filter thread for stacking with other lens filter or lens.

Consumables for PT-051 Underwater Cases



Silicone grease PSOLG-2
(5 g)



Silicone grease PSOLG-3
(40 g)




Silica gel SILCA-5S
(1 g x 5 pieces)



O-ring for PT-051 POL-041



Maintenance Set PMS-02

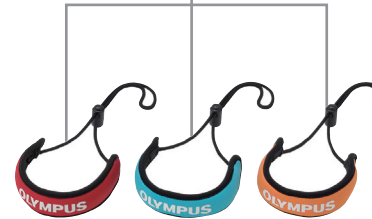

Hand strap

PST-EP01 RED

PST-EP01 BLU

PST-EP01 ORG